

SM-T19A LED Street Light

Product Description

SM-T19A LED Street Light is better than normal LED lights for its large number light sources. Which can be different with specific model and enables different light intensity. Also, with the help of its advanced chip, the speed of it to emit light would be much better than other LED street lights in the market. And the color rendering index of SM-T19A LED Street Light is higher than many other lights, helping drivers to identify the different signs correctly and reduce the incidence of traffic accidents effectively. What's more, SM-T19A LED Street Light is competitive for its outstanding working ability against harsh environments such as heavy rain, low temperature, and so on.

SM-T19A LED Street Light Features

- 1. IP65 driver box and optional photocell,
- 2. Modular pluggable technology, tool-free onsite maintenance,
- 3. Honeycomb and whole structure cooling technology, high efficient heat dissipation,
- 4. Double-coupling IP68 protection, highest waterproof level,
- 5. Intelligent constant current driving technology, long life span,
- 6. Ergonomic light distribution to achieve uniform illuminating effect,
- 7. Free modular serialization and full power range solutions.

Detailed Parameters



Input	Power	Power		Junction		CRI	Working	Stor		age
Voltage	Efficiency	Factor		Temperat	ure		Environment		Temperat	
									ure	
AC100V-	91%	0.95		<80℃		Ra≥70	-40 °C ~+50 °C		-40	$^{\circ}\!$
277V							10%~90%RH		~+50℃	
LED Life	Surge	ССТ		LED Brand	t	Installati	Material		IP Rating	
span	Protection					on				
						Diamete				
						r				
>60000Ho	10KV/5KA	3000К,		Lumileds		57~63m	Metal		LED	
urs		4000K	,			m			Module	
		5000K	,						IP68	3,
		5700K							Driver Box	
									IP65	
Model	System	LM/	LM/	Initial	Initial	Product	Packaging	N	.W.	G.W.
	Power	w	W	Lumen	Lumen	Size (mm)	dimension	(K	(g)	(Kg)
		(Ultr	(High	s(Ultra	S		(mm)			
		a)	High)	(High)					
		High)								
SM-T19A-1	40	155	115	6200	4600	575*350*	660*410*	7.	0	8.6

Address: Haicheng Road, Baiguan Industrial District, Shangyu Area, Shaoxing City, Zhejiang province, China; Tel: +861 8267537265, WhatsApp: +8618267537265; Email: sales@seminglighting.com



	7	<u> </u>			2				
						160	230		
	50	150	110	7500	5500	575*350*	660*410*	7.0	8.6
						160	230		
	60	145	105	8700	6300	575*350*	660*410*	7.0	8.6
						160	230		
SM-T19A-2	80	160	120	12800	9600	625*350*	710*410*	8.3	10.0
						160	230		
	100	155	115	15500	11500	625*350*	710*410*	8.3	10.0
						160	230		
	120	150	110	18000	13200	625*350*	710*410*	8.3	10.0
						160	230		
SM-T19A-3	120	160	120	19200	14400	705*350*	790*410*	9.5	11.3
						160	230		
	150	155	115	23250	17250	705*350*	790*410*	9.5	11.3
						160	230		
	180	150	110	27000	19800	705*350*	790*410*	9.5	11.3
						160	230		
SM-T19A-4	160	160	120	25600	19200	785*350*	870*410*	10.9	12.8
						160	230		
	200	155	115	31000	23000	785*350*	870*410*	10.9	12.8
						160	230		

Address: Haicheng Road, Baiguan Industrial District, Shangyu Area, Shaoxing City, Zhejiang province, China; Tel: +861 8267537265, WhatsApp: +8618267537265; Email: sales@seminglighting.com




					<u> </u>				
	240	150	110	36000	26400	785*350*	870*410*	10.9	12.8
						160	230		
SM-T19A-5	200	160	120	32000	24000	865*350*	950*410*	13.1	15.2
						160	230		
	250	155	115	38750	28750	865*350*	950*410*	13.1	15.2
						160	230		
	300	150	110	45000	33000	865*350*	950*410*	13.1	15.2
						160	230		
SM-T19A-6	240	160	120	38400	28800	945*350*	1030*410	14.6	16.9
						160	*230		
	300	155	115	46500	34500	945*350*	1030*410	14.6	16.9
						160	*230		
	360	150	110	54000	39600	945*350*	1030*410	14.6	16.9
						160	*230		
SM-T19A-7	280	160	120	44800	33600	1025**35	1110*410	15.8	18.2
						0*160	*230		
	350	155	115	54250	40250	1025**35	1110*410	15.8	18.2
						0*160	*230		


Product Display


Address: Haicheng Road, Baiguan Industrial District, Shangyu Area, Shaoxing City, Zhejiang province, China; Tel: +861 8267537265, WhatsApp: +8618267537265; Email: sales@seminglighting.com



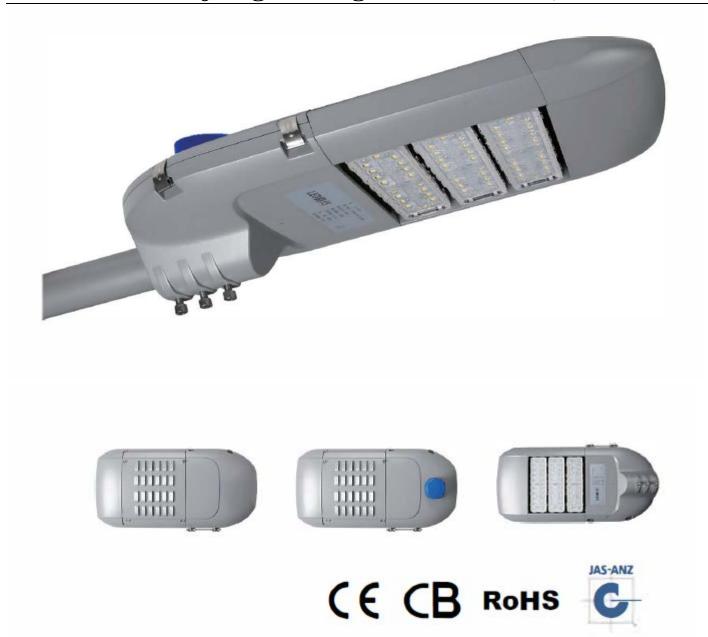

[Lighting Distribution Curve]

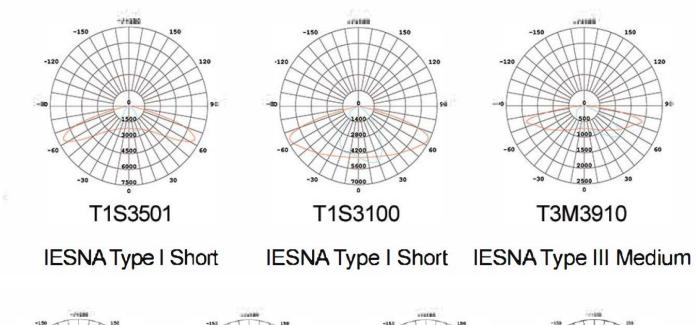

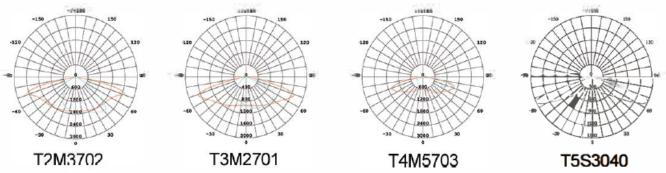

:SNA Type II Medium IESNA Type III Medium IESNA Type IV Medium IESNA Type VS Short

Application



