



SM-T6A LED Street Light

Product Description

SM-T6A LED Street Light is better than normal LED lights for its large number light sources. Which can be different with specific model and enables different light intensity. Also, with the help of its advanced chip, the speed of it to emit light would be much better than other LED street lights in the market. And the color rendering index of SM-T6A LED Street Light is higher than many other lights, helping drivers to identify the different signs correctly and reduce the incidence of traffic accidents effectively. What's more, SM-T6A LED Street Light is competitive for its outstanding working ability against harsh environments such as heavy rain, low temperature, and so on.

SM-T6A LED Street Light Features

1. Modular pluggable technology, tool-free onsite maintenance,
2. Honeycomb and whole structure cooling technology, high efficient heat dissipation,
3. Double-coupling IP68 protection, highest waterproof level,
4. Intelligent constant current driving technology, long life span,
5. Ergonomic light distribution to achieve uniform illuminating effect.
6. Free modular serialization and full power range solutions,

Detailed Parameters



Zhejiang Seming Electronic Co., Ltd

| | | | | | | | | | |
|---------------|------------------|----------------------------|----------------------|-----------------------------|------------------------|-----------------------------|---|-----------|-----------|
| Input Voltage | Power Efficiency | Power Factor | Junction Temperature | | CRI | Working Environment | Storage Temperature | | |
| AC100V-277V | 91% | 0.95 | <80°C | | Ra≥70 | -40 °C ~+50 °C 10%~90%RH | -40 °C ~+50°C | | |
| LED Life span | Surge Protection | CCT | LED Brand | | Installation Diameter | Material | IP Rating | | |
| >60000Hours | 10KV/5KV | 3000K, 4000K, 5000K, 5700K | Lumileds | | 57~63mm | Metal | LED Module IP68, Power supply IP67 | | |
| Model | System Power | LM/W (Ultra High) | LM/W (High) | Initial Lumen s(Ultra High) | Initial Lumen s (High) | Product Size (mm) | Packaging dimension (mm) | N.W. (Kg) | G.W. (Kg) |
| SM-T6A-1 | 40 | 155 | 115 | 6200 | 4600 | 725*335*90 | 860*435*180 | 4.7 | 6.3 |

Address: Haicheng Road, Baiguan Industrial District, Shangyu Area, Shaoxing City, Zhejiang province, China; Tel: +861 8267537265, **WhatsApp: +8618267537265; Email: sales@seminglighting.com**



Zhejiang Seming Electronic Co., Ltd

| | | | | | | | | | |
|--------------|-----|-----|-----|-------|-------|----------------|-----------------|-----|-----|
| | 50 | 150 | 110 | 7500 | 5500 | 725*335* 90 | 860*435* 180 | 4.7 | 6.3 |
| | 60 | 145 | 105 | 8700 | 6300 | 725*335* 90 | 860*435* 180 | 4.7 | 6.3 |
| SM- T6A-2 | 80 | 160 | 120 | 12800 | 9600 | 725*335* 90 | 860*435* 180 | 5.9 | 7.5 |
| | 100 | 155 | 115 | 15500 | 11500 | 725*335* 90 | 860*435* 180 | 5.9 | 7.5 |
| | 120 | 150 | 110 | 18000 | 13200 | 725*335* 90 | 860*435* 180 | 5.9 | 7.5 |
| SM- T6A-3 | 120 | 160 | 120 | 19200 | 14400 | 725*335* 90 | 860*435* 180 | 6.5 | 8.1 |
| | 150 | 155 | 115 | 23250 | 17250 | 725*335* 90 | 860*435* 180 | 6.5 | 8.1 |
| | 180 | 150 | 110 | 27000 | 19800 | 725*335* 90 | 860*435* 180 | 6.5 | 8.1 |

Product Display


Address: Haicheng Road, Baiguan Industrial District, Shangyu Area, Shaoxing City, Zhejiang province, China; Tel: +861 8267537265, **WhatsApp: +8618267537265; Email: sales@seminglighting.com**



Zhejiang Seming Electronic Co., Ltd




CE CB RoHS




T1S3501

IESNA Type I Short




T1S3100

IESNA Type I S




T3M3910

IESNA Type III Medium




T2M3702

IESNA Type II Medium




T3M2701

IESNA Type III Medium

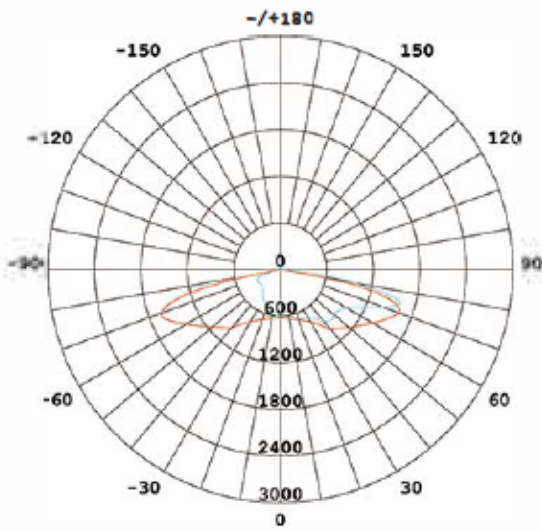

T4M5703

IESNA Type IV Medium

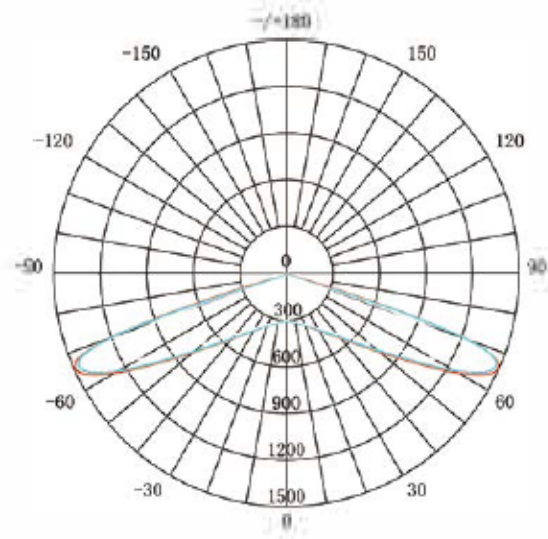

T5S3040

IESNA Type VS Short

Application



Zhejiang Seming Electronic Co., Ltd



Address: Haicheng Road, Baiguan Industrial District, Shangyu Area, Shaoxing City, Zhejiang province, China; Tel: +861 8267537265, **WhatsApp: +8618267537265**; **Email: sales@seminglighting.com**